

FIG.407



CHECK VALVE zCHE



Body material	Nominal pressure	Nominal diameter	Max. temperature
A Grey cast iron	C 16 bar	DN 40-250	100°C**
	B 10 bar	DN 300-600*	

* on request
** Maximum temporary working temperature 100°C



correspond to the pressure equipment directive 2014/68/UE
marking CE for DN≥65

FEATURES

- compact settlement
- environment-friendly
- no maintenance
- allows installation in all positions

APPLICATION

industries



SHIPBUILDING
INDUSTRY



HEATING

media



GLYCOL



INDUSTRIAL
WATER




NEUTRAL FLUIDS

Data given can be changed without notice.

Edition 01/2025

FIG.407

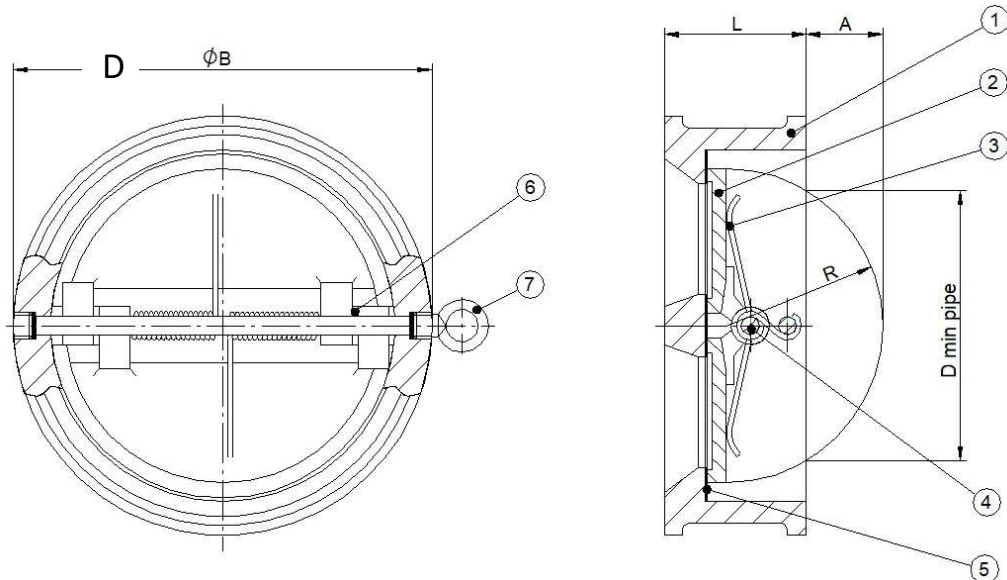MATERIALS, DIMENSIONS


	Body material	A
	Type	54
1	Body	EN-GJL-250 5.1301 (ex.JL1040)
2	Plate	X5CrNi18-10 1.4301
3	Spring	X5CrNi18-10 1.4301
4	Pin	X5CrNi18-10 1.4301
5	Seal	EPDM
6	Sleeve	Teflon
7	Sling for DN125 - 600	S235JR
Max. temperature		100°C

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
D min pipe (mm)	36	42	60	66	86	115	143	197	231	281	330	378	416	464	567
L (mm)	43	43	46	64	64	70	76	89	114	114	127	140	152	152	178
A (mm)	6,8	8,6	15,2	14,3	22,3	33,7	45,4	69,6	74,5	102,7	124,7	142,7	156,8	179,7	217,4
D (mm)	91	107	127	142	162	192	218	273	328	378	437	489	539	594	695
R (mm)	25,8	27	35	42	50	64	77	102,5	125	146	170	195	215	238	292
K _{vs} (m³/h)	34	34	54	95	200	320	467	990	1584	2783	3689	6076	7825	11563	19919
Weight (kg)	1,2	1,5	2,3	3,6	4,35	6,0	8,6	15,2	24	35,2	58	71	101	125	170

Data given can be changed without notice.

Edition 01/2025

FIG.407

PRESSURE-TEMPERATURE RATINGS

Acc. EN 1092-2	PN		-10°C ÷ 100°C
EN-GJL-250	16	bar	16
	10	bar	10

HYDRAULIC CHARACTERISTICS

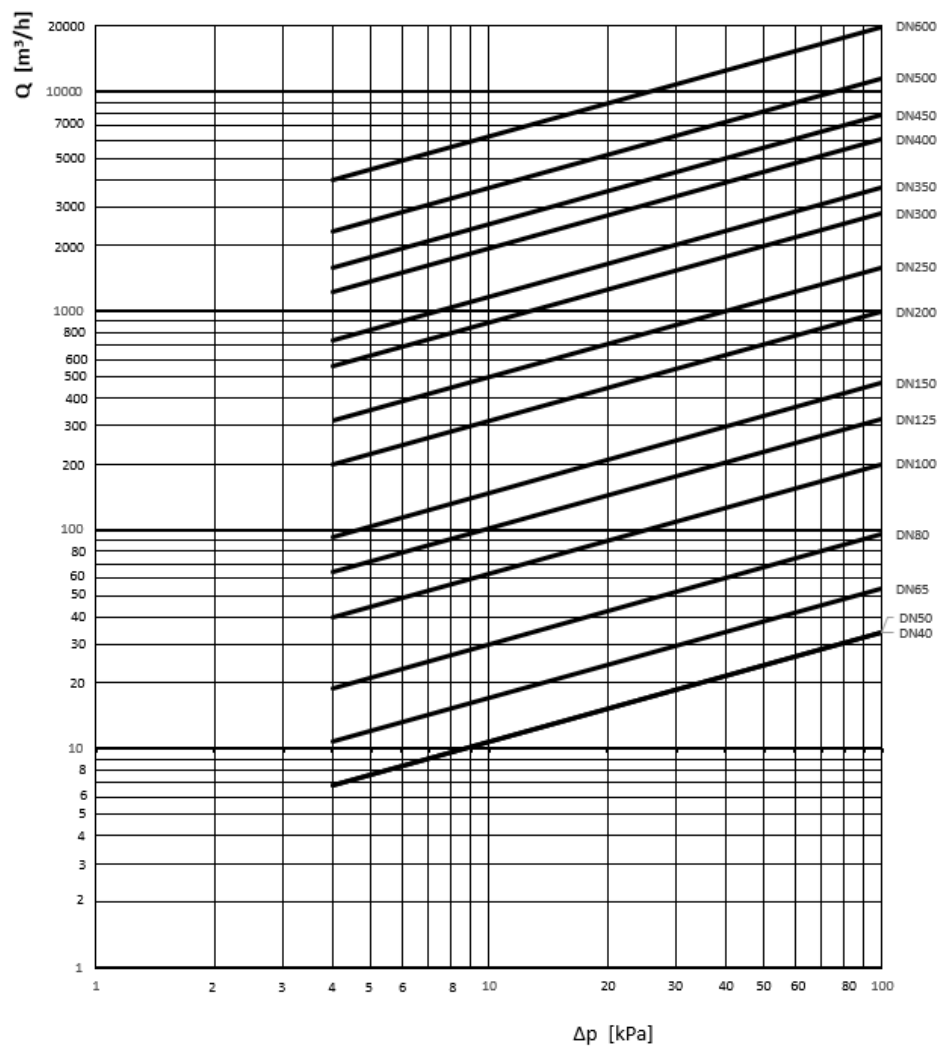


FIG.407


TYPE

Figure	Body material	Nominal diameter	Nominal pressure	Type
407	A Grey cast iron EN-GJL-250	40-250 mm	C 16 bar	54 closing EPDM / stainless steel; epoxy painted; plate stainless steel
		300-600 mm	B 10 bar	54 closing EPDM / stainless steel; epoxy painted; plate stainless steel

ORDERING

Figure	Body material	Nominal diameter	Nominal pressure	Type
407	A Grey cast iron EN-GJL-250	300-600 mm	B 10 bar	54 closing EPDM / stainless steel; epoxy painted; plate stainless steel

Order example acc. index

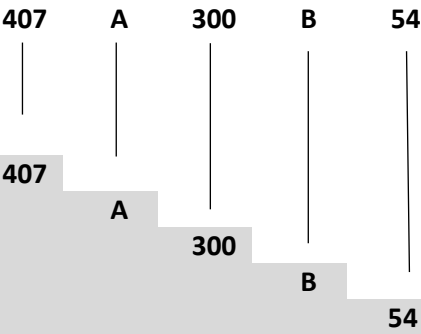

Check valve, ends wafer type, form straight
Grey cast iron EN-GJL-250
Nominal diameter (mm)
Nominal pressure PN 10
Closing EPDM / stainless steel; epoxy painted; plate stainless steel

Data given can be changed without notice.

Edition 01/2025